



# PC View User Guide



## Wired Video Security Systems

Compatible Products:

UDVR45x4 | UDVR85x4 | UDVR85x8  
Guardian G6 Series | Guardian G7 Series



# User Information

Admin User Name: \_\_\_\_\_

Admin Password: \_\_\_\_\_

IP Address: \_\_\_\_\_

System Name: \_\_\_\_\_

## Table Of Contents

1. Install .....	4
2. Using the Software .....	5
2.1 Login .....	5
2.2 Register .....	5
2.3 Password Lost .....	6
2.4 Main Interface .....	6
2.5 Control Panel .....	9
2.6 Add the Device .....	9
2.6.1 Quick Add .....	9
2.6.2 Add a Device Manually .....	11
2.7 Alarm Setting .....	12
2.8 Video Playback .....	13
2.8.1 Remote Video Playback .....	13
2.8.2 Local Video Playback .....	14

# 1. Install


Double-click to open the installation file. The installation window will pop up.

(Note: The version number may be different than shown.)



Installation Window

Click **Next** and then **Install**.

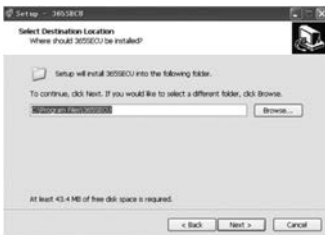

Setup Window

After the software is done installing, click **Finish**.



Setup Window

## 2. Using the Software

### 2.1 Login

Once the application has been opened, the **Login** screen will pop up.

Enter your account name and password to login. If you do not have an account set up yet, you can click **Register**.

(Note: The account used to login on the desktop can also be used as the mobile login.)



Login Screen

### 2.2 Register

Click **Register** on the **Login** screen to enter the **Registration** screen.

Enter the required fields and click **Register**. **Return** will take you back to the login screen without registering.




Registration Screen

## 2.3 Password Lost

If you have an account, but forgot your password, you can retrieve your password via email. Click **Password Lost** and fill in your username.

**Mail Query:** Check the email associated with the account.

**Retrieve Password:** System will send an email to the user's email address allowing them to reset their password.

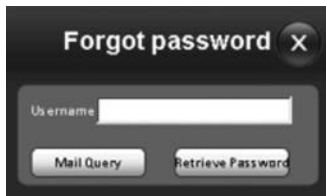

Forgot Password Screen

## 2.4 Main Interface



After successfully logging in, the user will enter the **Main Interface**.

The **Main Interface** is divided into four parts: the top navigation bar, the left menu bar with the device list and function buttons, the middle preview screen, and the play toolbar along the bottom.



Main Interface



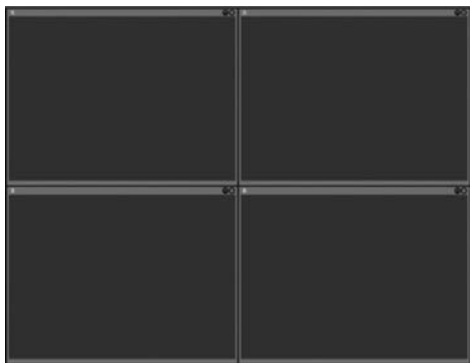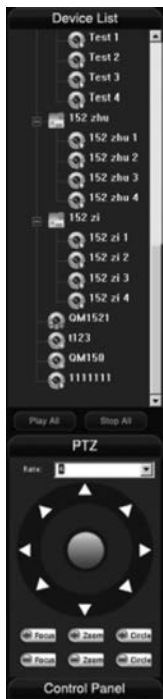












Navigation Bar



Preview Screen

Device List and Function Buttons

The following functions can be accessed from the **Main Interface**:


Icon	Function Description	Icon	Function Description
	Directory: For equipment management and grouping of operations.		Local Video: Select a live preview screen to start capturing the video. Video files are saved on your PC.
	Equipment: Multi-channel DVR, NVR, etc. If the corresponding equipment is not online, the icon displays as grey instead of green.		Local Snap: Select a live preview screen to capture a screenshot. The snap images are stored on your PC.
	Camera: An IPC, channel, etc. If the camera is not online, the icon displays as grey instead of blue.		Talkback: Control the real-time two-way intercom.
	Expand: Single picture full-screen playback. You can also double-click on the preview to enter full-screen playback.		Monitoring: Control the one-way reception of playback audio.
	Close: Turn off the live preview.		Sign Out
	Full Screen: Enter full screen.		Page Up
	Split Screen: Supports 1, 4, 9, 16, 25, 36, 49 and 64 split screens.		Page Down
	Help: Click to open the help interface.		



## 2.5 Control Panel

The **Control Panel** allows access to the following functions:

- **Screen Locking:** Lock the screen. Once locked, you will not be able to do any operations apart from unlocking.
- **Log Off:** Logout of the current account.
- **Playback:** Play the remote and local video files.
- **Photos:** View local images saved from the capture function.
- **Password Correcting:** Modify the account password.
- **Alarm Settings:** Set up the alarm monitoring types.
- **Device Searching:** Search all devices in the LAN.
- **Device Administration:** Rename, add and delete a device.



Control Panel

## 2.6 Add the Device

### 2.6.1 Quick Add

In the **Control Panel**, select **Search Device**.



Search Device Window

## 2.6.1 Quick Add *continued*

Select a device and then click **Add to the List**.



Add Device Window

Enter the device settings:

- **Parent Directory:** Add the camera to specific directory.
- **Camera Name:** Add a display name for the device.
- **Username:** Add the login username for the device.
- **Password:** Add the login password for the device.
- **Channel:** A channel number is automatically assigned, starting with Channel 1.
- **Stream:** Select a stream format for live viewing. By default it is set as Sub Stream.

After finished, click **Add** and **OK**.



## 2.6.2 Add a Device Manually

In the **Control Panel**, select **Device Management**.

Select a device from the list, then click **Add the Camera**.



Device Management Screen

Enter the following information:

- **Device Name:** Select a display name to make the device easier to identify.
- **Device Type:** Indicate if it is a Camera or Device.
- **Connection Modes:** Select from IP address and port access mode or P2P.
- **Protocol:** Select the device's protocol setting.
- **UMID:** Enter the device's ID to identify the device.
- **Username:** Enter the device's login username.
- **Password:** Enter the device's login password.
- **Channel:** A channel number is automatically assigned, starting with Channel 1.
- **Stream:** Assign a device stream format for live preview. The default is Sub Stream.



Add Camera Window

## 2.6.2 Quick Add *continued*

(Note: You can look for your DVR's serial ID on the device or go to **Main Menu** > **Information** > **System** > **Serial ID**)



Serial ID Location

## 2.7 Alarm Setting

From the **Control Panel** click **Alarm Set**.



Alarm Set Screen


From the **Alarm Set** screen, you can access the following functions:

- **Guard:** Select from four alarm types and activate monitoring.
- **Unguard:** Deactivate monitoring for all alarm types.
- **PC Push:** Provides “push” notifications to your PC.
- **Add Number:** Add a phone number to receive SMS notifications of alarms.
- **Delete Number:** Remove phone number.
- **Turn Off the Alarm:** Turn off the alarm.
- **Open the Alarm:** Turn on the alarm.
- **View the Alarm Information:** After starting your PC, view all alarms as push notifications.

## 2.8 Video Playback

### 2.8.1 Remote Video Playback

On the **Control Panel**, select **Video Playback** and then **Remote Record**.



Video Playback Selection



Select a device, set up the query time and click **Query** to view video information.

Double click a video in the list to play the video file.

File Name	Start time
00:2014-02-1...	2014-02-11 14:50:29
00:2014-02-1...	2014-02-11 14:52:05
00:2014-02-1...	2014-02-11 15:48:20
00:2014-02-1...	2014-02-11 16:48:20
00:2014-02-1...	2014-02-11 17:48:20

Remote Video List



Remote Video Playback Screen

## 2.8.2 Local Video Playback

In the **Control Panel**, select **Video Playback** and **Local Record**.



Local Record Playback Screen

Select the date of the local video you would like to view.  
Double click a video in the query list to play it.

**Uniden®**

©2017 Uniden America Corporation, Irving TX.

**[uniden.com](http://uniden.com)**